製品仕様書

06172A

NET-ACCESS 背面用観音ﾄﾞｱ ﾊﾝﾁﾝｸﾞ仕様

Part Numbers: CNDS

©Panduit Corporation Japan Branch

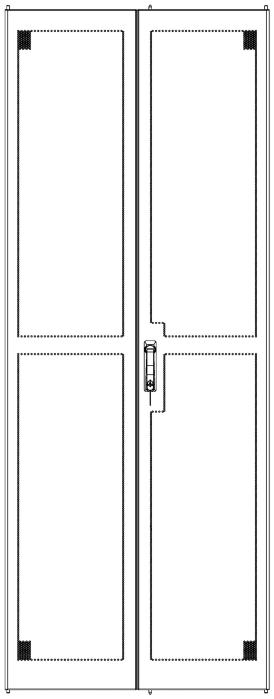

製品仕様

材質	鉄に耐腐食性のﾒｯｷ

環境性能

使用環境	使用温度範囲	-10 ～ +60 [℃]
	使用湿度範囲	25 ～ 85 [%] (結露なきこと)
	設置場所	事務所･住宅等の屋内のみ (水気･直射日光･機械的衝撃･過重等は厳禁)

寸法　詳細は別紙寸法図を参照 (寸法はインチとなり、[ ] 内はメートル表示です)

公称寸法	W 794 × D 23 × H 2063 [mm] (公差 ±1.524 [mm])

NET-ACCESS 背面用観音ﾄﾞｱ ﾊﾞﾝﾁﾝｸﾞ仕様

Part Numbers: CNDS

©Panduit Corporation Japan Branch

質量

公称重量	17.2 [kg]

カラー

ｶﾗｰ	BL (ﾌﾞﾗｯｸ)

構成品

ｷｰｾｯﾄ	1 式	
取扱説明書	1 式	

含有化学物質調査

調査項目	RoHS対応済み	現用品

©Panduit Corporation Japan Branch

改版履歴

版数	改版日	変更内容	担当
01	2007.01.11	初版制定	山之内

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

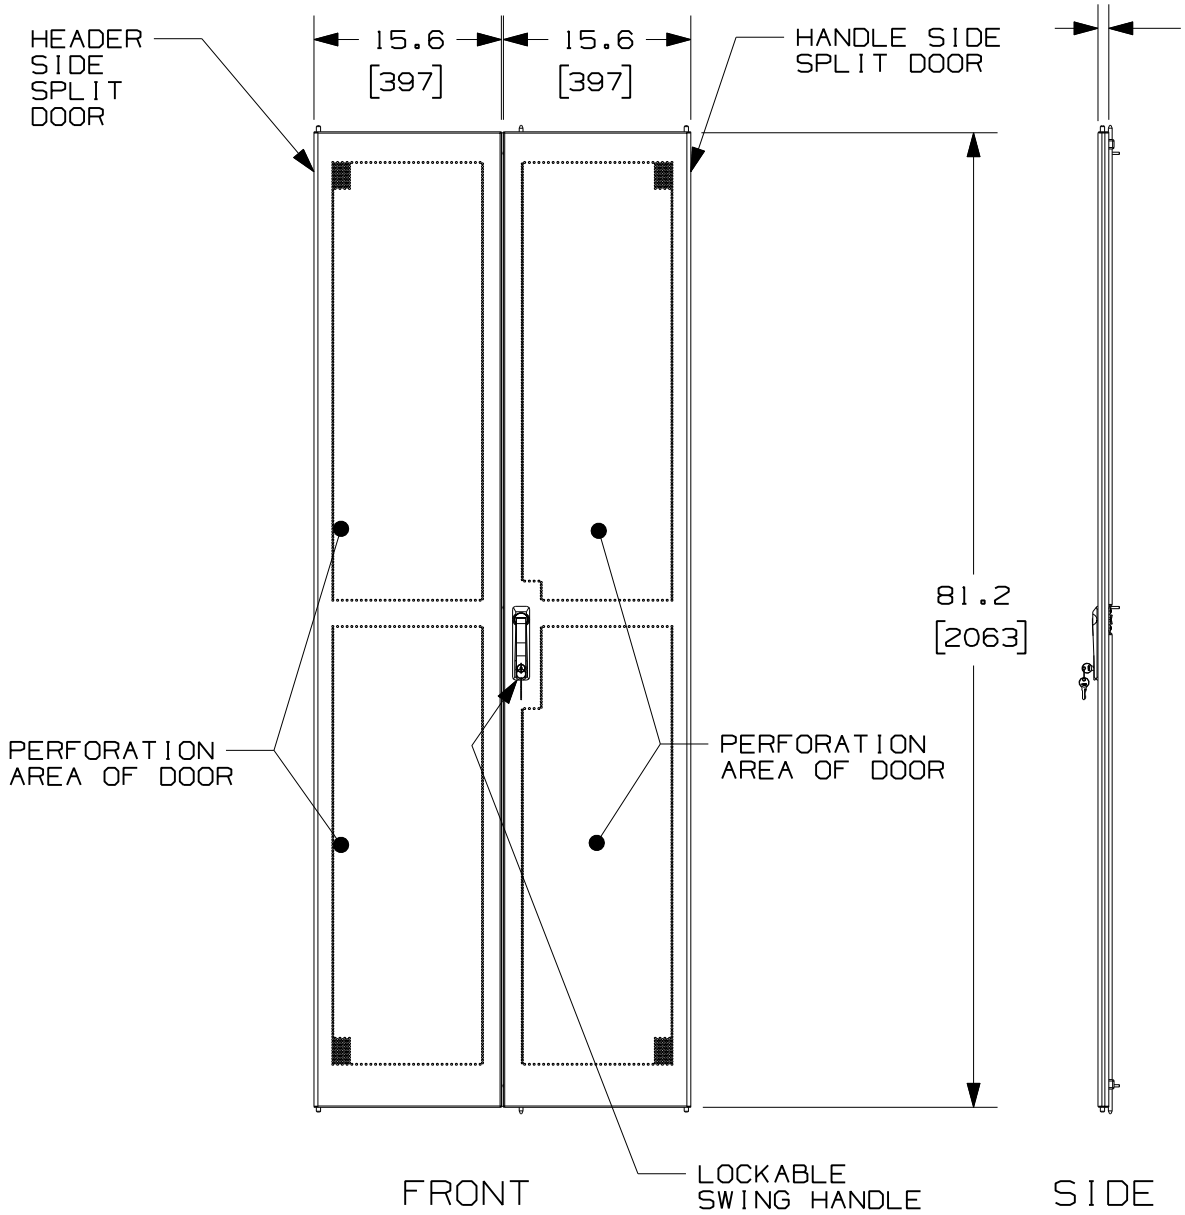

PANDUIT P/N	WEIGHT
CNDS	38 LBS/EACH 17.2 Kg/EACH

NOTES:
1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
2. PARTS SUPPLIED:
   1 - HANDLE SIDE SECTION
   1 - HEADER SIDE SECTION
3. DIMENSIONS IN PARENTHESIS ARE METRIC.

MODEL FILENAME: V10395AX_32_SP-DR_FG_ASSY_00.PRT

CAD FILENAME/LAYERS: V10395AX_DC_00A.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

SPLIT DOORS CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

INCHES		[METRIC - MILLIMETER]		ANGLE
X.X	+/- 0.06	X.	+/- 1.5	+/- 1°
X.XX	+/- 0.03	X.X	+/- 0.8	
X.XXX	+/- 0.015	X.XX	+/- 0.4	

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
00	1-10-07	LEE		RELEASED TO PRODUCTION	10395-29			

DRAWN BY: LEE

DATE: 1-10-07

CHK'D:

MAT'L: SEE NOTES

SCALE: NONE

DRAWING NO.: 10395-29

DWG: A SIZE